
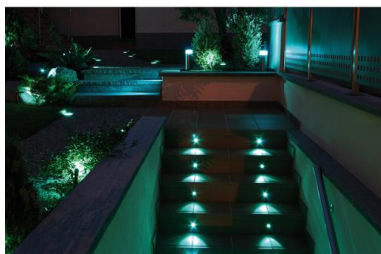


NINO 220B-L0203D-30

Underwater recessed NINO IP68 LED SMD 3W 250lm CRI80 5700K 30°

Stainless steel

Family submersible recessed Nino is made of stainless steel, it has IP68 and is suitable for installation outside water. There are two versions of the embedment depth: 8cm and 6cm. Available in warm white, RGB, plus neutral color, blue, red and green (only version 6cm).



GENERAL DATA

Category	Underwater Lights
Family	Nino
Finish	[30] Stainless steel
Location	Outdoor
Installation	Wall
Body material	Inox aisi 316L
Diffuser material	Transparent methacrylate
Frame material	Stainless steel
ETIM class	EC000481
EAN	8435256567915

LIGHT SOURCES AND BEAMS

Sources	LED SMD 3W max. 250lm 5700K CRI80
Energy efficiency	G
Beam	30° - Direct symmetric

TECHNICAL DATA

Dimensions	Height x Width x Length (mm): 40 x 40 x 83
IP	IP68
Protection class	Class III
Frequency	50/60 Hz
Input voltage	12V AC V
Auxiliary gear	Without equipment, needed
Glow wire temperature	850.0 °C
Lifetime	50,000 h
LED lifetime L	80
LED lifetime B	20
Weight	0.55 Kg
Cable outlets	1
Lead wire length	2,500.0 mm
Cut hole dimensions	Diameter x Depth (mm): 29 x 83
ECORAE category I	LED-A
ECORAE I	0.25
Periodic maintenance	Yes
Flammable surfaces	Yes

NOTES

For tube PVC PN-16 Ø40
Available in warm white and DMX
Suitable for installations outside water

NINO

220B-L0203D-30

Underwater recessed NINO IP68 LED SMD 3W 250lm CRI80 5700K 30°
Stainless steel

RECOMMENDED ACCESSORIES



B02I-X33F9D-02

Power supplies ALIMENTADORES
Black

Input voltage	230V AC
Frequency	50/60
Wattage (W)	350.0
IP	IP65
Protection class	Class II



B02I-X33G1D-02

Power supplies ALIMENTADORES
Black

Input voltage	230V AC
Frequency	50/60
Wattage (W)	700.0
IP	IP65
Protection class	Class II

NINO 220B-L0203D-30

Underwater recessed NINO IP68 LED SMD 3W 250lm CRI80 5700K 30°
Stainless steel

PRODUCTS OF THE SAME FAMILY



Nino R RGB