


# CLINA 492A-L0105B-02

Bollard CLINA IP55 LED COB 10W 900lm CRI90 3000K 558mm Black

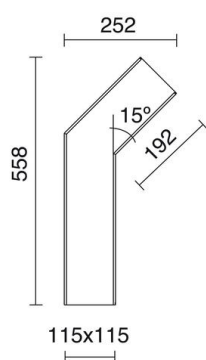

The Clina beacon is made of aluminum with IP55, available in two colors: brown and black. The emission temperature is 4000K. The light is scattered directly. It is suitable for lighting outdoor garden areas.

## GENERAL DATA

|                   |                      |
|-------------------|----------------------|
| Category          | Bollards and columns |
| Family            | Clina                |
| Finish            | [02] Black           |
| Location          | Outdoor              |
| Installation      | Floor                |
| Body material     | Aluminum             |
| Diffuser material | Frosted methacrylate |
| ETIM class        | EC000301             |
| EAN               | 8433264119928        |

## LIGHT SOURCES AND BEAMS

|                   |                                    |
|-------------------|------------------------------------|
| Sources           | LED COB 10W max. 900lm 3000K CRI90 |
| Energy efficiency | F                                  |
| Beam              | Direct asymmetric                  |

## TECHNICAL DATA

|                    |                                               |
|--------------------|-----------------------------------------------|
| Dimensions         | Height x Width x Length (mm): 558 x 115 x 252 |
| IP                 | IP55                                          |
| Protection class   | Class I                                       |
| Frequency          | 50/60 Hz                                      |
| Input voltage      | 220-240V AC V                                 |
| Auxiliary gear     | Without equipment, not needed                 |
| Lifetime           | 50,000 h                                      |
| LED lifetime L     | 70                                            |
| LED lifetime B     | 10                                            |
| Weight             | 2.6 Kg                                        |
| Cable outlets      | 1                                             |
| ECORAE category I  | LED-B                                         |
| ECORAE I           | 0.5                                           |
| Anchorage included | Yes                                           |
| Flammable surfaces | Yes                                           |