



1

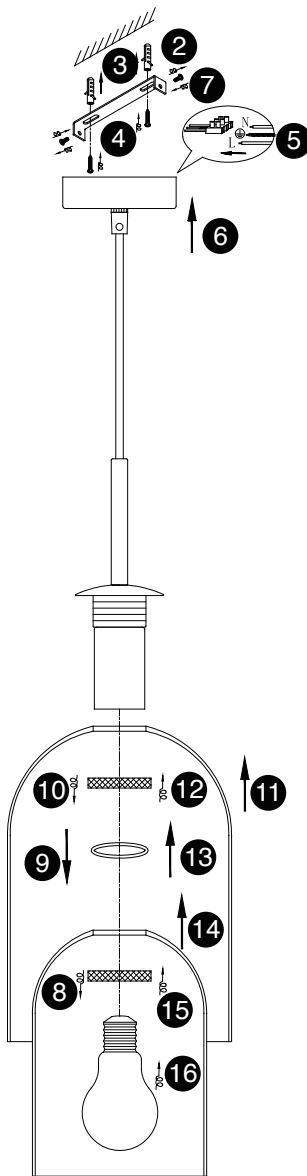

17

- | | |
|--|-------------------------------------|
| 1. Turn off the general switch | 8. Remove the cap holder |
| 2. Untight the top caps | 9. Remove the ring |
| 3. Drill holes and apply plastic anchors | 10. Remove the cap holder |
| 4. Apply screws | 11. 12. Apply glass & apply the cap |
| 5. Connect wires | 13. Apply the ring |
| 6. Put the canopy in place | 14. 15. Apply glass & apply the cap |
| 7. Apply the side csrews | 16. Apply bulb |
| | 17. Turn on the general switch |