
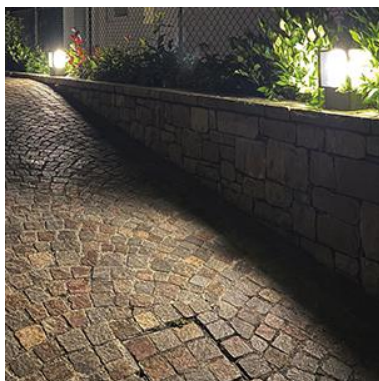


AURA 932C-L3114B-90 Bollard AURA IP65 LED SMD 14W 1760lm CRI80 3000K 120° 260mm Brown oxide



GENERAL DATA

Category	Bollards and columns
Family	Aura
Finish	[90] Brown oxide
Location	Outdoor
Installation	Floor
Body material	Aluminum
Diffuser material	Opal polycarbonate
ETIM class	EC000301
EAN	8433264168704

LIGHT SOURCES AND BEAMS

Sources	LED SMD 14W max. 1760lm 3000K CRI80
Total flux	820 lm
Energy efficiency	E
Beams	120°

TECHNICAL DATA

Dimensions	Width x Depth x Height (mm): 160 x 160 x 260
IP	IP65
IK	08
Protection class	Class I
Frequency	50/60 Hz
Input voltage	220-240V AC V
Output current	350 mA
Power factor	0.9
Auxiliary gear	Electronic
Auxiliary equipment brand	TCI
Operating temperature range	-20 - 50 °C
Lifetime	50,000 h
LED lifetime L	80
LED lifetime B	20
Weight	9.1 Kg
Cable outlets	1
ECORAE category I	LED-C
Anchorage included	Yes
Photobiological risk group	RGo

AURA

932C-L3114B-90 Bollard AURA IP65 LED SMD 14W 1760lm CRI80 3000K 120° 260mm Brown oxide

PRODUCTS OF THE SAME FAMILY



Aura L2000



Aura L400



Aura L680