




Ø260/10.2"
400/15.7"
Ø80/3.2"

Mounting	Table
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	12
Energy class light source	D
Light source	SMD LED
Light source included	Yes
Luminous Flux (lm)	782
Color temperature (K)	2700K
Dimmable luminaire (W)	Yes
CRI	>80
Switch type	Potentiometer
Cable length	2000 mm
Structure material	Steel
Diffuser material	PC
Structure finish	Matt Black+Copper
Diffuser finish	Opal

Installation instructions

Energy label

Photometric

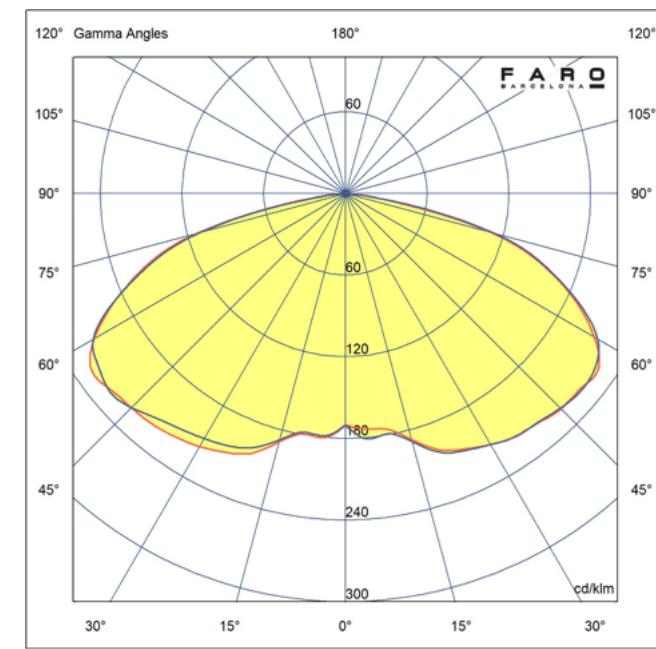

Related accessories



Tider Cable Management Accessory

Reference	20546
Structure material	TPU

