


IP20




Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3,5
Energy class light source	F
Light source	COB LED
Light source included	Yes
Luminous Flux (lm)	299
Color temperature (K)	2700K
Dimmable luminaire (W)	No
Opening angle degrees	36
Tilt angles	90
Rotation angles 2	355
CRI	≥90
Suitable for seaside areas	No
Driver included	Yes
Supply current	200 mA
Switch type	On/Off
Structure material	Aluminium
Structure finish	Matt White
RAL/Pantone structure	RAL 9010
Shade finish	Matt White
Cut-out Size for Recessed Mount	ø 85
Minimum Recessed Height (mm)	40
Maximum Ceiling Thickness (mm)	18

Installation instructions

Energy label

Photometric

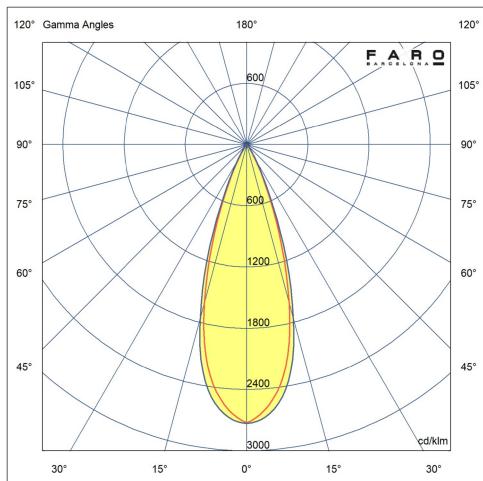

Related accessories

Leo Recessed Accessory

Reference	43800
Structure material	Steel





