


Mounting	Wall
Voltage (V)	24VDC
Class	III
IP	65
IK	07
Power (W)	3
Energy class light source	G
Light source	COB LED
Luminous Flux (lm)	77
Color temperature (K)	2700K
Light orientation	Indirect lighting
CRI	>90
Recommended driver On/Off	98324031
Luminaires per On/Off driver	De 1 a 10
Recommended DALI driver	98324101
Luminaires per DALI driver	De 1 a 25
Recommended CASAMBI driver	98324599
Luminaires per CASAMBI driver	De 1 a 30
Structure material	Aluminium
Diffuser material	Glass
Structure finish	White
Diffuser finish	Transparent
Cut-out Size for Recessed Mount	37X96
Includes recessed box	Yes
Included Accessory	Caja de empotrar

 [Installation instructions](#)

 [Energy label](#)

 [Photometric](#)

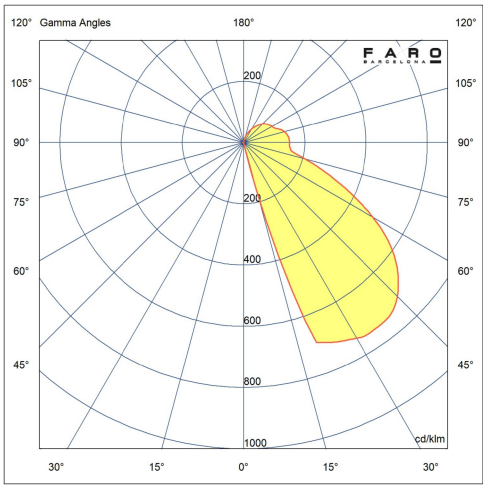

Recommended Drivers



SOURCE D'ALIMENTACION 24VDC 30W IP67

Reference	98324031
Voltage (V)	24VDC
IP	67
Power (W)	30
Control System	on/off

24Vdc 100W IP67 DALI power supply

Reference	98324101
Voltage (V)	220V-240V
Power (W)	100W
Control System	Dali



POWER SUPPLY 24VDC 120W 5A Casambi

Reference	98324599
Voltage (V)	24VDC
IP	20
Power (W)	120
Control System	Casambi